



s.r.l.

Italian quality, italian flexibility

New solutions for **blown** film **extrusion**




# COEXPERT

Compact and versatile coextrusion three layers lines



# COEXPERT

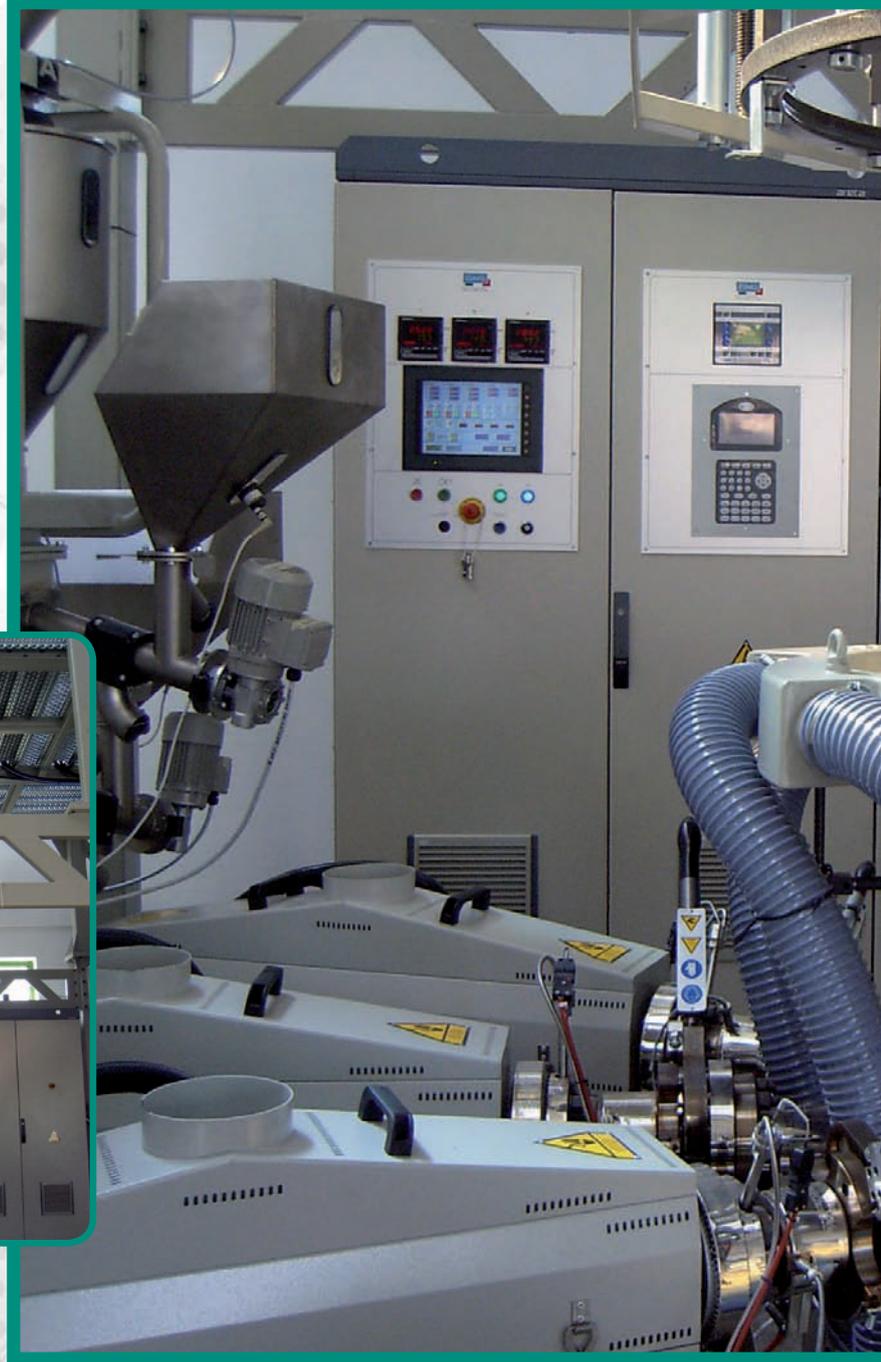


## The new utility for coextrusion

“Coexpert” is born to satisfy the market’s increasing demand for coex lines dedicated to the processing of multilayer films made of polyolefins and biodegradable materials with increased quality and technological standard, easy to install, with the capability for rapid production changes, efficient in various application fields, and with limited overall dimensions and power consumption.

In a word: with high profit.

The strong points of the “Coexpert” line are the extrusion components which are at the top end of technology: extruders with A/C motors driven by inverter, screws with barrier profile, 3 layers extrusion heads with radial distribution and chromed internal surfaces, dies with interchangeable male. High efficiency air ring with dual lip technology, bubble stability achieved over a wide diameter range with an internal bubble cooling system using cooling fans controlled via inverter.

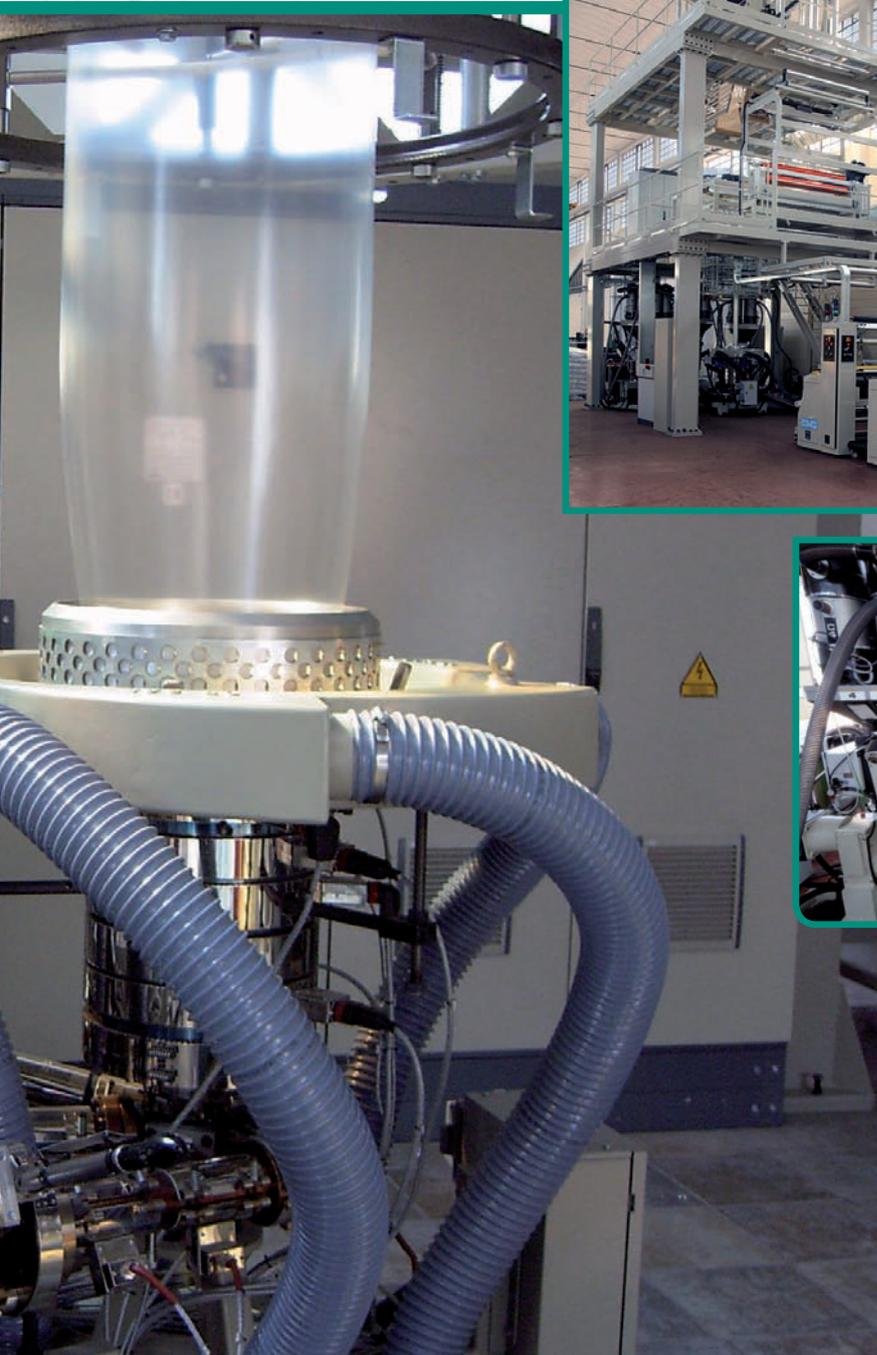


The TA winder, characterized by its “user friendly” simplicity, is available for different line speeds up to a maximum of 150 m/min. The operator’s panel is a graphic intuitive and multi-language interface driven by PLC.

The line configuration enables to limit the overall dimensions

MODEL			S	M	M Plus	X	XL
Width	gross	mm	1400	1600	1800	2000	2400
	net	mm	1300	1500	1700	1900	2300
Extruders			2x45	2x45	3x55	2x55	2x55
			1x55	1x55	-	1x75	1x75
Fixed head			<b>CBH 300</b>	<b>CBH 300</b>	<b>CBH 500/700</b>	<b>CBH 700</b>	<b>CBH 700</b>
Dies range	min-max	mm	100/225	100/225	150/350-300/600	300/600	300/600
Double flux air ring			<b>CR 400</b>	<b>CR 400</b>	<b>CR 400/650</b>	<b>CR 650</b>	<b>CR 650</b>
IBC			upon request				
Horizontal / vertical rotating haul off			<b>HO 1400</b>	<b>HO 1600</b>	<b>HO 1800</b>	<b>HO 2000</b>	<b>HO 2400</b>
Max. reel diameter		mm	1000				
Automatic winder			<b>TA new - single or double</b>				
Line speed		m/min	75 / 100 / 125 / 150 / 175				

Dosing system, corona treater, microperforator upon Customer's request.

## Where we are

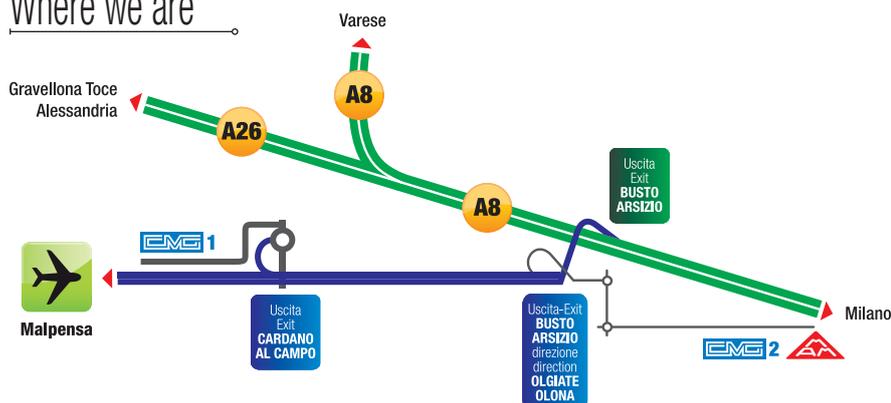

### CMG s.r.l.

Registered office: Corso Europa, 71  
21010 Cardano al Campo (VA) - Italy

Headquarters: Via Diaz, 80/82

21057 Olgiate Olona (VA) - Italy

Tel. + 39 0331 378 31

Fax +39 0331 378 352

cmg@cmggallia.com

www.cmggallia.com - www.mam2.it

SATELLITE POSITION:  
coordinates 45.3753 - 8.5228